

Filtration units PL

A WIDE RANGE OF FILTERING UNITS



Robust and reliable



Fine filtration



Do it Yourself



Large range

ASSETS

- Attractive and high-performance, adapted to all types of pool
- Anti-corrosion tank for use in all climates: Suitable for outdoor use and unaffected by water treatment products or salt water
- Blown high density polyethylene filter with automatic purge
- Pump with resists chemical and saline corrosion
- Supplied with 6 way valve, pressure gauge and turbidity sight-glass
- Reliable: 3,5 bar maximum pressure on the tank




- VARI-FLO™ 6-way valve
- 1,1 Liter pre-filter basket. Easy access to the pre-filter through the quarter turn cover
- Drain valve designed for easy draining of filter water

Item	Flow rate	Filter surface	ø Tank	Sand	Valve	Pump	ø Pipes	Manometer	Flow indicator	Gencod
FILTRATION UNITS										
81069	5 m³/h	0.10 m²	350 mm	25 kg*	7"	0.25 HP	38 mm	Yes	Yes	3660149810693
81070	6 m³/h	0.13 m²	400 mm	50 kg*	7"	0.33 HP	38 mm	Yes	Yes	3660149810709
81071	8 m³/h	0.20 m²	500 mm	100 kg*	7"	0.50 HP	38 mm	Yes	Yes	3660149810716
81072	10 m³/h	0.20 m²	500 mm	100 kg*	7"	0.75 HP	38 mm	Yes	Yes	3660149810723
81073	14 m³/h	0.28 m²	600 mm	150 kg*	7"	1 HP	38 mm	Yes	Yes	3660149810730

* Sand not supplied

** 6 way valve (filtration, backwash, waste, circulation, rinse and close) + 1 neutral position (winter)

Dimensions	A	B	C	D	E	F	G	H
81069	749 mm	742 mm	348 mm	756 mm	730 mm	406 mm	83 mm	558 mm
81070	771 mm	749 mm	348 mm	806 mm	749 mm	406 mm	83 mm	607 mm
81071	806 mm	749 mm	348 mm	964 mm	806 mm	406 mm	83 mm	607 mm
81072	806 mm	749 mm	348 mm	964 mm	806 mm	406 mm	83 mm	607 mm
81073	851 mm	749 mm	348 mm	1071 mm	851 mm	406 mm	83 mm	873 mm

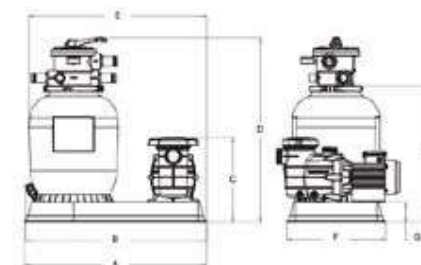

Technical Specifications

Max. water temperature	40°C
Operating pressure	0.5 - 1.3 bar
Maximum pressure	3.5 bar
Connection	1.5" (ø 401 mm - ø 612 mm) 2" (ø 762 mm - ø 895 mm)
Tank	Blown polyethylene, suitable for saltwater
Granulometry of filtration media	0.4 ÷ 0.8 mm

