

MINI PROJECTOR

GET TO IT'S
WEB PAGE



Light up your spa, pool steps, or submerged beaches !

For installation during construction, the SEAMAID mini-projector lights up specific areas of the pool.

Screws into a vacuum fitting or wall fitting with a 1.5" thread.

CONSTRUCTION



Compatible with all types of pool

Comes in 2 versions:

COLOUR LIGHTING on/off : To add splashes of colour to your pool, this projector has 11 colours and 5 automatic programs. The exclusive SEAMAID optic lens brings out a harmonious blend of colours.

> Includes a memory of the last program used and a Reset function.


WHITE LIGHTING: Ideally included in the original design, this projector spreads light around a basin area up to 5 meters evenly, without dazzling bathers.

It is controlled by turning the power on/off at the pool's general electric panel.





Did you know?


The rear of the plug has a 1.5" male thread to make the SEAMAID mini-projector easier to install, as no specialist tools are required.



REF	Ø SIZE	COLOUR	LUMINOUS FLUX	NUMBER OF LEDS	POWER
500866	125mm	RGB on/off	223lm	36	7 WATTS
500859	125mm	WHITE	540lm	12	6 WATTS

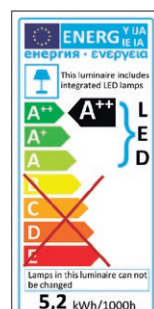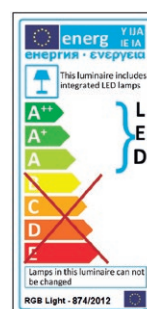

Complementary Product :

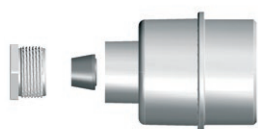

Installation kit for above ground pool
(see page 28)



Installation kit for inground pool
(see page 28)




Remote control switch 1C and 4C
(see page 16)


Easy to install :

You just need a wall fitting with a 1.5" vacuum fitting at the end, and then screw the rear part of the SEAMAID mini-projector into it by hand. The power lead is fed through the vacuum fitting in watertight conduit to the connection box (provided with 2m of 2x1.5mm² HO7RNF cable and 2 heat shrinkable connectors).

Installation diagram :

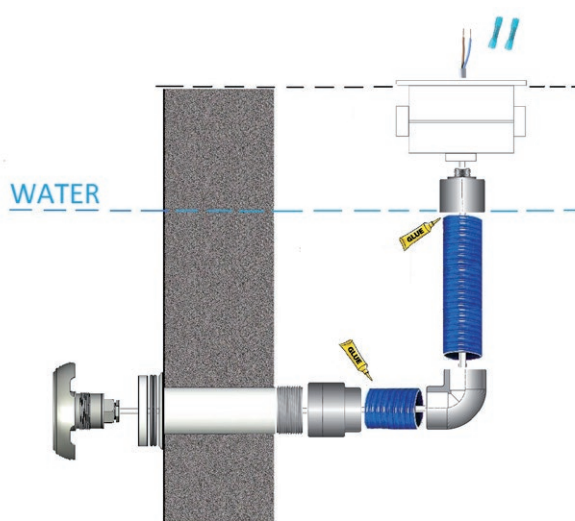

Inground pool with liner

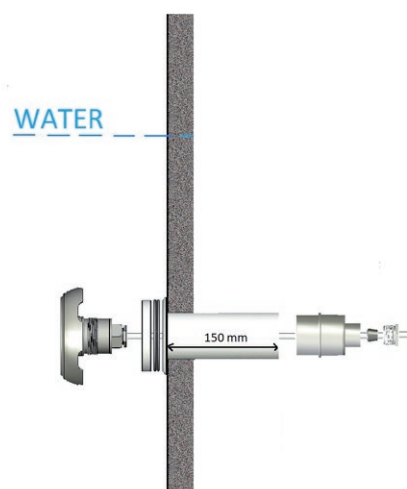

Above ground pool

Installation recommendations :

These pool projectors must be connected to a two-coil insulated safety transformer that is at least 20% more powerful than the total power absorbed by the connected projectors. It is important to check the compatibility of the vacuum fitting before finalising installation. Certain models equipped with a stop thread are not suitable. The wall fitting will be connected to the connection box with watertight conduit. For best results, use connection accessories from SEAMAID to guarantee a completely waterproof installation.

Roll the extra cable up in the connection box to ensure that you will be able to replace the projector in the future out of the water. As an optional extra, you may install a radio switch between the lamp (or group of lamps) and the transformer in order to remotely turn the device on and off, or synchronise multiple devices (see page 16).